



Minimum and Maximum Sizes



glas facades Vision 3000 windows have been engineered to maximise architects' design flexibility by allowing larger than average window sizes

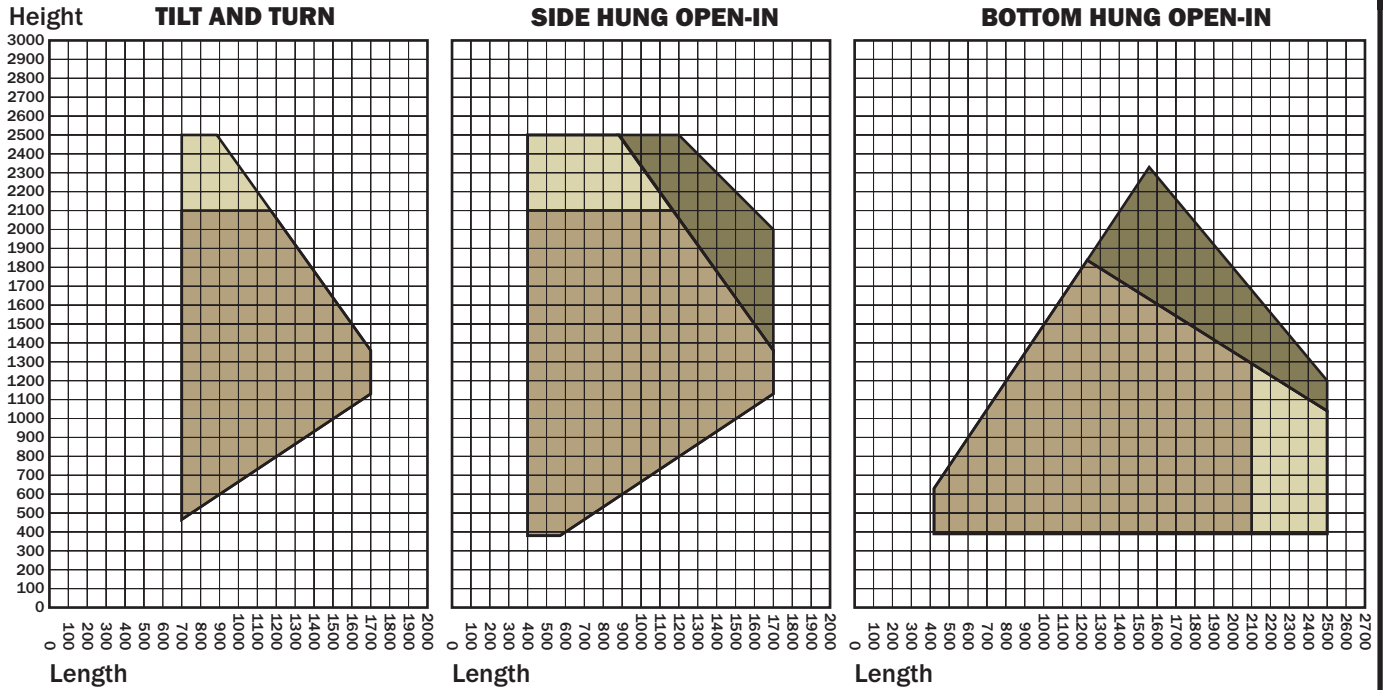

FIXED LIGHT WINDOW (dummy vent or minimum sightline)

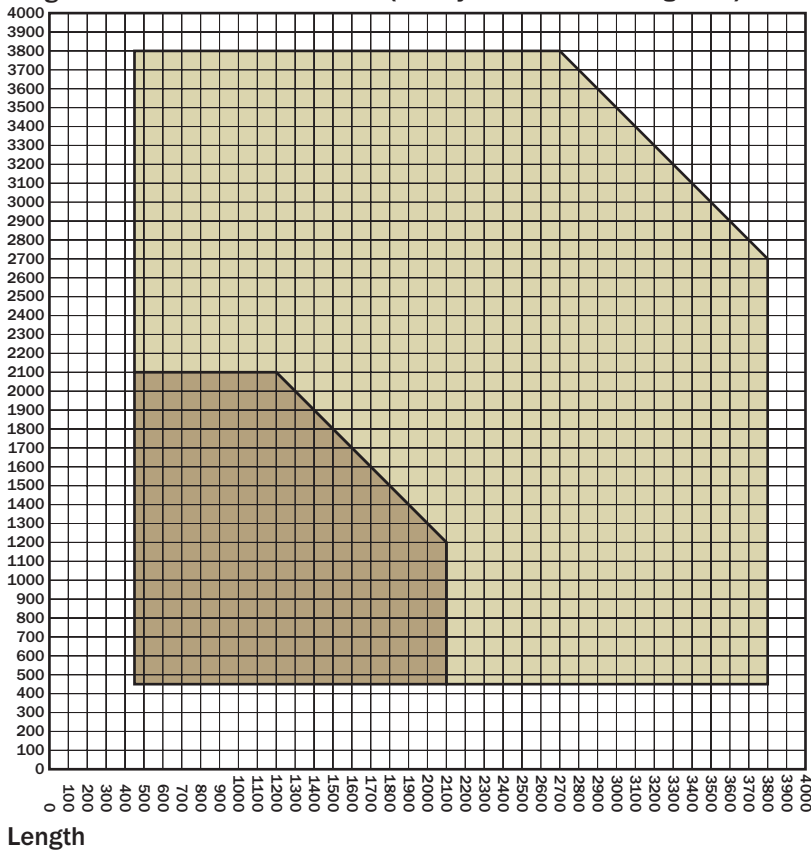

- Standard Hinges / 4mm glass thicknesses**
 Limits using 2 no. standard hinges (Maco Multi Trend DT to Tilt and Turn casements and Anuba Herkula 320 hinges to side / bottom hung casements) and glass configurations using 4mm or thicker glasses

- Standard Hinges / 6mm glass thicknesses**
 Limits using 2 no. standard hinges (Maco Multi Trend DT to Tilt and Turn casements and Anuba Herkula 320 hinges to side / bottom hung casements) and glass configurations using 6mm or thicker glasses

- Heavy Duty Hinges / 6mm glass thicknesses**
 Limits using 2 no. heavy duty hinges (Anuba Herkula 520 hinges to side / bottom hung casements) and glass configurations using 6mm or thicker glasses

Sizes are based on using glass configurations of up to 55 kg/m² (20mm thickness of glass total). Larger windows can be constructed using alternative hinges and glass types by application to glas technical.